

IS500 \sim 220-240 V 50/60 Hz

IS1600
 IS16231

Dimensions: L (Length), H (Height), W (Width), F (Mounting distance), E (Mounting hole offset).

| | L | H | W | F | E |
|--------|------|----|----|------|-----|
| 600mm | 650 | 88 | 89 | 370 | 100 |
| 1200mm | 1200 | 88 | 89 | 820 | 200 |
| 1500mm | 1500 | 88 | 89 | 1120 | 200 |

1

x2 IP54
 x1 IP66
 x2
 x4
 x2
 x4
 0010369
 x2
 x2
 0010362

2

3 ⚡ 230-240V




a b c d e f g h i
 L1200mm d e f
 L1500mm g h i

4 a to h ✓ i X

a
 ? IP54

5

1 2

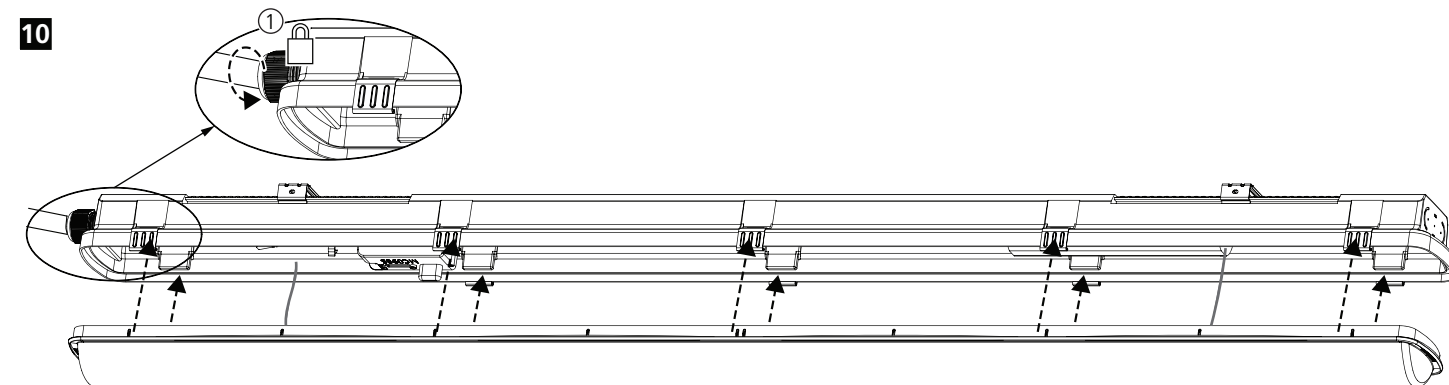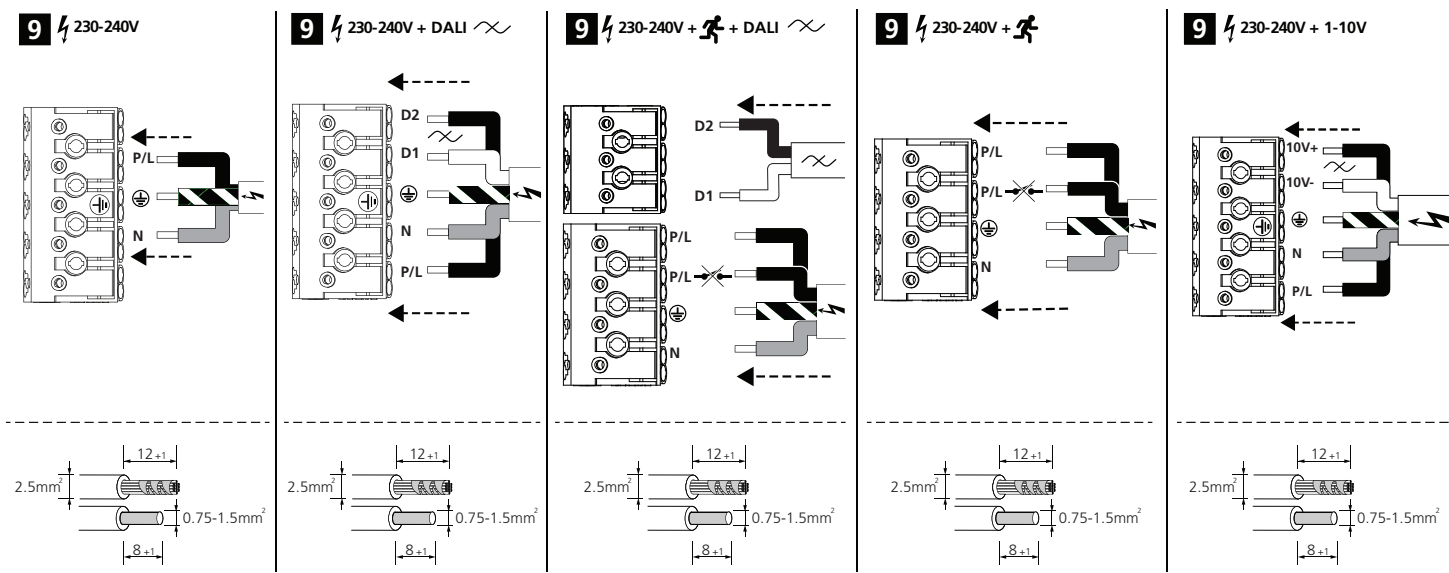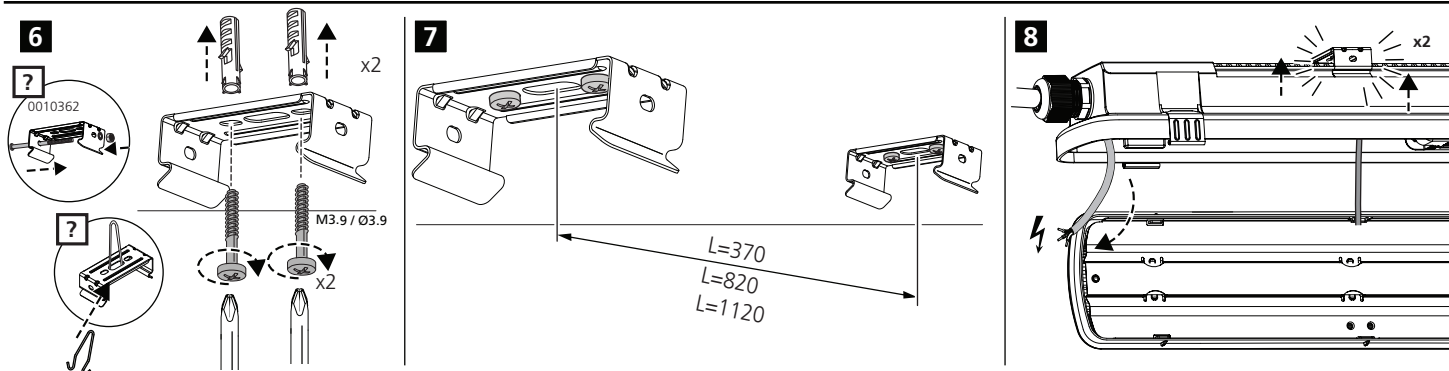

x6 - 600mm LED
 x10 - 1200mm LED
 x12 - 1500mm LED

